

ES50 Heavy Duty Pass-Through Recirculating Warewasher



The Eswood ES50 warewasher is Australian designed and built to last in harsh conditions. Its compact form excels in commercial kitchens, offering continuous performance. Independent upper and lower spray arms ensure thorough cleaning, while digital temperature displays ease monitoring. Standard detergent and rinse aid pumps streamline the process. Meeting high health and sanitary standards with FSANZ, HACCP, and WaterMark certifications, the ES50 is a reliable and efficient solution for safe food handling and maintaining a hygienic workspace.

ES50 standard features and benefits

- · Counter-balanced lift-up hood with ergonomically designed wrap around handle
- Durable stainless-steel body construction and wash arms
- Automatic fill to wash and rinse tanks
- Digital wash & rinse temperature controllers & displays
- 1000-Watt wash pump
- 3 Wash programs to match degree of soil
- · Detergent and rinse aid pump as standard
- Suitable for corner or inline installation
- Easily removable spray arms and filters
- 7200-Watt rinse water temperature booster
- Operation interlocked to rinse temperature
- · Machine starts upon closure of hood

Standard accessories

- 2 x plate rack
- 1 x cup rack
- 1 x cutlery container









JESWOOD











Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice








ES50 Heavy Duty Pass-Through Recirculating Warewasher

- A. Drain connection 2" BSP
- B. Hot water supply inlet $\frac{1}{2}$ " BSPF (15-58 psi / 100-400 kPa) 65°C
- C. Electrical connection 4150V / 50Hz / 3Ph+N+E



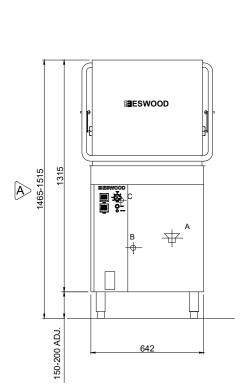

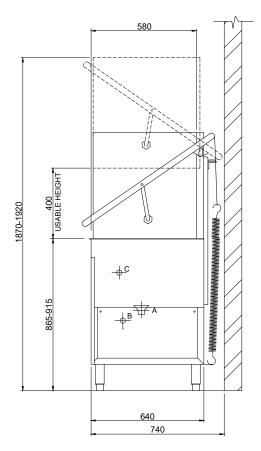







ES50 SPECIFICATIONS

DIMENSIONS (WxDxH)	645 x 645 x 1490 mm
HEIGHT WITH DOOR OPEN	1895 mm
RACK SIZE (WxD)	500 x 500 mm
ELECTRICAL CONNECTION	415V/50Hz/3Ph+N+E
RATING	10.3 kW / 14.2 Amps
WATER CONNECTION	½" BSPF (15-58 psi / 100-400 kPa) 65°C
DRAIN CONNECTION	2" BSP
MEAL SERVICE	120 - 200 pax (50 racks/hr)

60, 90 and 120 sec
Fitted
Fitted
Optional
4L/cycle
45L
112 kg
0.6 m ³

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

